

# 3300 Single Hung



## Performance Ratings S.H. - Thermal

	Low E	Low E -grids	Low E/ Argon	Low E-grids Argon
"U" Value	.32	.32	.29	.29
Solar Heat Gain	.30	.27	.30	.27
Visible Light Transmittance	.56	.50	.54	.48

## Performance Ratings S.H. - Structural

Size	Rating
Up to 40x74	R50/DP50
48x84	R35/DP35

# 3500 Double Hung

## Performance Ratings D.H. Structural

Size	Rating
40x72	H-LC50/DP50
48x84	H-LC15/DP15



## Performance Ratings D.H. - Thermal

	Low	Low E grids	Low E/ Argon	Low E-grids Argon
"U" Value	.33	.33	.30	.30
Solar Heat Gain	.30	.27	.30	.27
Visible Light Transmittance	.52	.47	.52	.47

# 3300 Sliding Window

## Performance Ratings - Thermal

	Low E	Low E -grids	Low E/ Argon	Low E-grids Argon
"U" Value	.33	.33	.29	.29
Solar Heat Gain	.31	.28	.30	.27
Visible Light Transmittance	.54	.48	.54	.48

For the greatest unobstructed view of the beautiful scenery surrounding a home, choose one of our horizontal slider windows. Easy-to-operate and to clean, a sliding window has a more contemporary look but will also blend easily into traditional and contemporary homes.



## Performance Ratings Structural

Size	Rating
Standard 2 panel 72x56	R25/DP25

You'll enjoy the air ventilation that the slider offers, with up to half of the full window size opening for circulation.

# 3500 XX Slider

## Performance Ratings - Thermal

	Low E	Low E -grids	Low E/ Argon	Low E-grids Argon
"U" Value	.31	.31	.28	.28
Solar Heat Gain	.29	.26	.29	.26
Visible Light Transmittance	.52	.46	.52	.46



# 3500 Casement Window

## Performance Ratings - Structural

Size	Rating
Up to 36x72	R50/DP50

## Performance Ratings - Thermal

	Low E	Low E -grids	Low E/ Argon	Low E-grids Argon
"U" Value	.32	.32	.29	.29
Solar Heat Gain	.30	.27	.29	.27
Visible Light Transmittance	.56	.50	.56	.50



# 3500 Awning

## Performance Ratings Structural

Size	Rating
Up to 48x24	R50/DP50

## Performance Ratings Thermal

	Low E	Low E -grids	Low E/ Argon	Low E-grids Argon
"U" Value	.32	.32	.29	.29
Solar Heat Gain	.30	.27	.29	.27
Visible Light Transmittance	.56	.50	.56	.50



# Window Shapes & Configurations

## 3700 Single Hung

### Performance Ratings Structural


Size	Rating
Up to 40x72	R50/DP50

IMPACT RATING: ZONE 3



### Performance Ratings Thermal

	Low E	Low E grids	Low E Argon	Low E grids Argon
"U" Value	.34	.34	.30	.30
Solar Heat Gain	.30	.27	.22	.20
Visible Light Transmittance	.53	.47	.50	.45

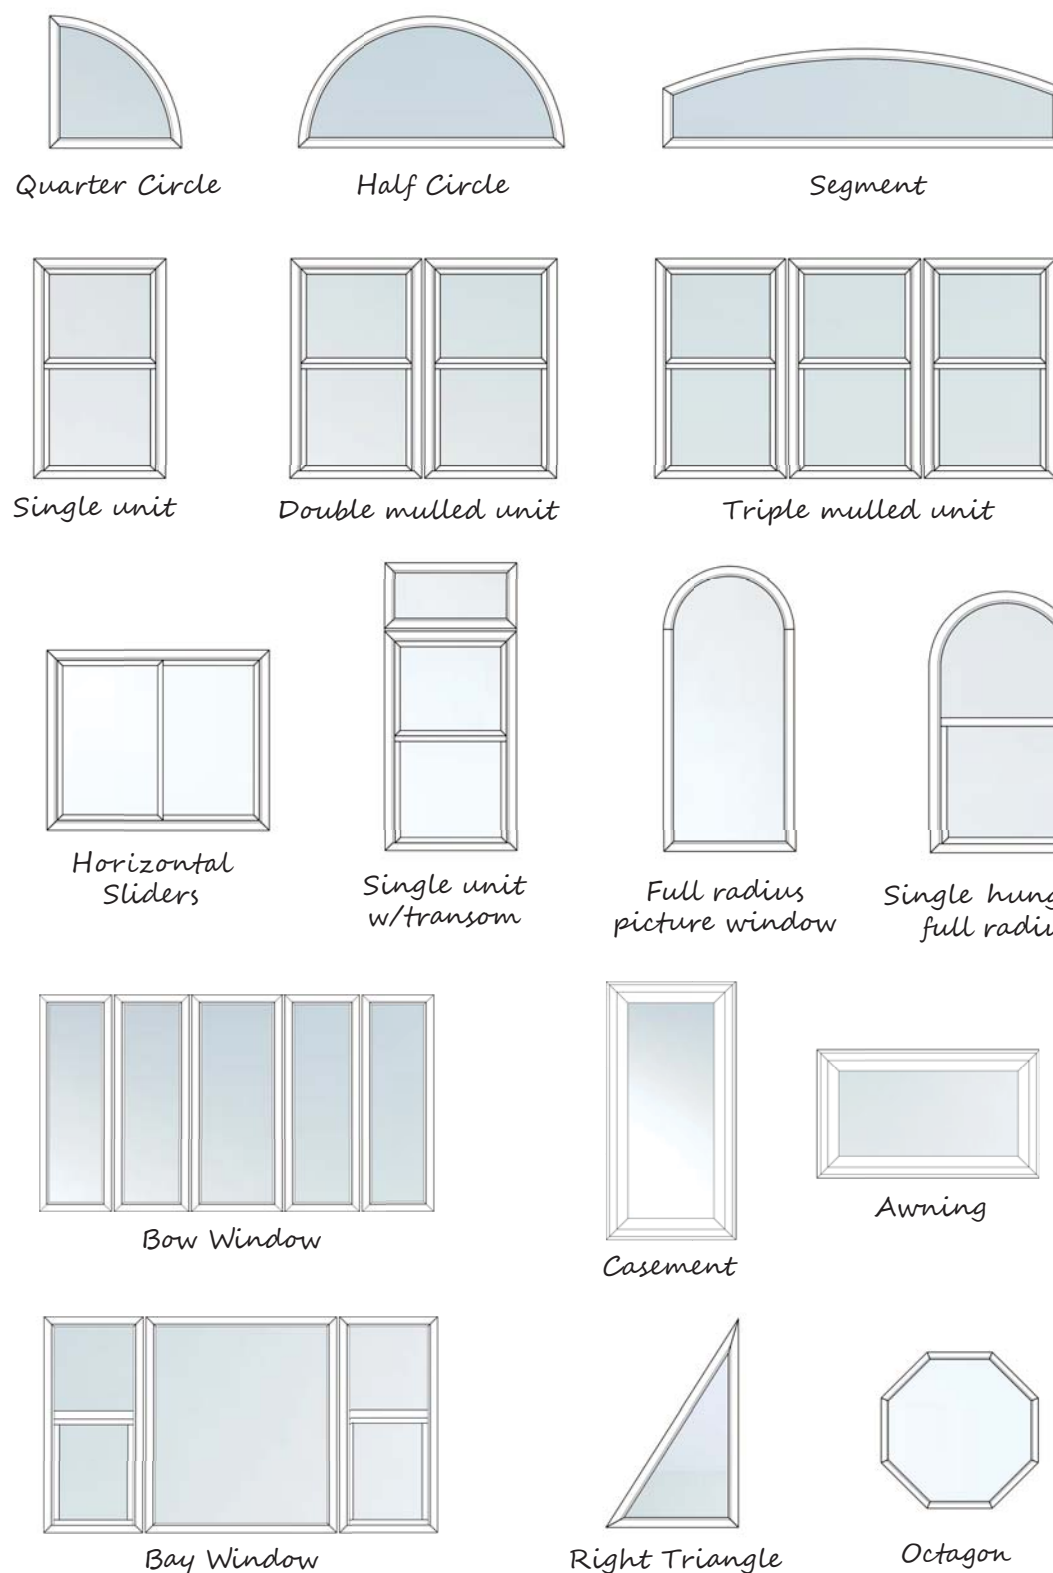

## 3000 Series Replacement Products

Moss Supply offers the 3000 Series Replacement windows. Available in a full line of products, including Single hung, Double hung, Casement, Slider and a new high performance Impact Single hung for high wind and coastal regions.

[www.mosssupply.com](http://www.mosssupply.com)



### Features Include:

- Fiberglass screen
- Fully welded sash and frame
- Grid options: 7/8" flat, 1" profile
- Colors: White, Beige Clay & painted Bronze
- Full weather-stripping to keep the wind & weather outside